

SMALL VICE GRIP

applicable for packaging materials, paper, plastic foils, wires, yarns, etc.

Available also a version with aluminium body and stainless steel handles for higher temperatures (SP227+Mu) and a complete stainless steel version for testing in corrosive environment and under high temperatures (SP227-A4).


Item no.:	SP227
Max. load:	400 N
Opening:	0-8 mm (depending on jaws)
Coupling:	M5 internal thread Further couplings on request
Body:	Aluminium, anodized
Temperature range:	0 ... +130°C (depending on jaws)
Weight:	60 gram per grip without jaws
Scope of supply:	1 pair of grips without jaws



Jaws for SP227: Scope of delivery 1 set = 4 jaws

Item number:	Surface:	Clamping surface H x W:	Opening:	Temperature range:	Weight per pair:
SP227-B25	Blank jaws	10 x 25 mm	0 - 8 mm	-70...+280°C	18 gram
SP227-BG25	Rubber jaws	10 x 25 mm	0 - 6 mm	-20...+80°C	19 gram
SP227-BP25	Pyramid jaws	10 x 25 mm	0 - 8 mm	-70...+280°C	17 gram
SP227-BV8-25x25	V-jaws	Height 25 mm	2 - 8 mm Ø	-70...+280°C	40 gram
SP227-BW25x25	Wave jaws	25 x 25 mm	0 - 6 mm	-70...+280°C	48 gram
SP227-BD25	Diamond jaws	10 x 25 mm	0 - 8 mm	-70...+280°C	18 gram
SP227-B50	Blank jaws	10 x 50 mm	0 - 6 mm	-70...+280°C	46 gram
SP227-BG50	Rubber jaws	10 x 50 mm	0 - 4 mm	-20...+80°C	48 gram
SP227-BP50	Pyramid jaws	10 x 50 mm	0 - 6 mm	-70...+280°C	43 gram
SP227-BW25x50	Wave jaws	25 x 50 mm	0 - 6 mm	-70...+280°C	100 gram
SP227-BD50	Diamond jaws	10 x 50 mm	0 - 6 mm	-70...+280°C	46 gram
SP227-B100	Blank jaws	10 x 100 mm	0 - 6 mm	-70...+280°C	92 gram
SP227-BG100	Rubber jaws	10 x 100 mm	0 - 4 mm	-20...+80°C	95 gram
SP227-BP100	Pyramid jaws	10 x 100 mm	0 - 6 mm	-70...+280°C	86 gram
SP227-BD100	Diamond jaws	10 x 100 mm	0 - 6 mm	-70...+280°C	92 gram

Jaws with other dimensions and surfaces on request

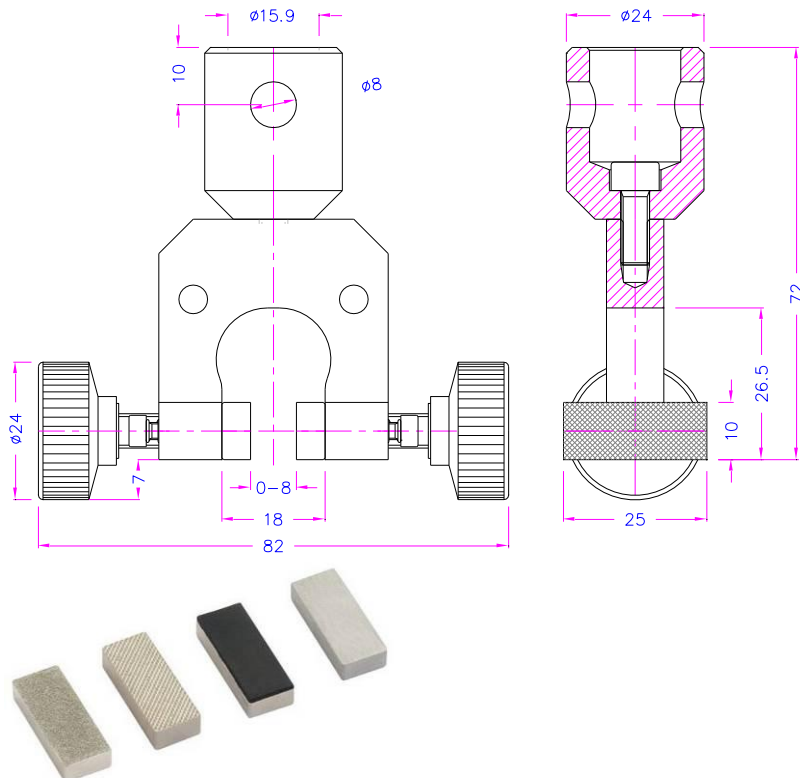

Blank jaws

- Suitable for own further treatment
- Steel-blanks without coating




Rubber jaws

- 1mm rubber coating (NBR)
- Nickel-plated




Pyramid jaws

- Pyramids 0.8x45°
- Hardened steel 58 HRC
- Nickel-plated



Wave jaws

- For flexible materials
- Wave 5 mm
- Hardened steel 58 HRC
- Nickel-plated



Diamond jaws

- Clamping surface coated with synthetic diamonds
- Nickel-plated



V-jaws

- For all kinds of round samples
- Tooth pitch 0.8 mm
- Hardened steel 58 HRC
- Nickel-plated



Small vice grip, same as SP227, but with stainless steel handles for higher temperatures

Item no.:	SP227+Mu
Max. load:	400 N
Opening:	0-8 mm (depending on jaws)
Coupling:	Inner thread M5. Further couplings on request
Material:	Aluminium, anodized (body) Stainless steel (handles)
Jaws:	See SP227 (page 1)
Temperature range:	Temperature range: -70°C ... +180°C depending on jaw type
Scope of supply:	1 pair of grips without jaws

Complete stainless steel version. Applicable for testing in high corrosion environments e.g.:

- in salt water, perfect for coastal and marine environments,
- under highly acidic conditions,
- at high temperatures

Item no.:	SP227-A4
Max. load:	1000 N
Opening:	0-8 mm (depending on jaws)
Coupling:	Inner thread M5. Further couplings on request
Material:	Stainless steel
Temperature range:	-80°C ... +280°C depending on jaw type (see table below). Further temperature ranges on request.
Weight:	115 gram per grip without jaws
Scope of supply:	1 pair of grips without jaws




with adapter Af159



Jaws for SP227-A4. Scope of delivery 1 set = 4 jaws

Item number	Surface	Clamping surface H x W	Opening	Temperature range:	Weight per pair
SP227-B-A4	Blank jaws	10 x 25 mm	0 – 8 mm	-80...+280°C	18 gram
SP227-BG-A4	Rubber jaws	10 x 25 mm	0 – 6 mm	-20...+80°C	19 gram
SP227-BP-A4	Pyramid jaws	10 x 25 mm	0 – 8 mm	-80...+280°C	17 gram



*For testing under high temperatures but without corrosive environment like salt water or acidity, it is possible to use SP227-A4 with standard SP227 jaws (see page 1).

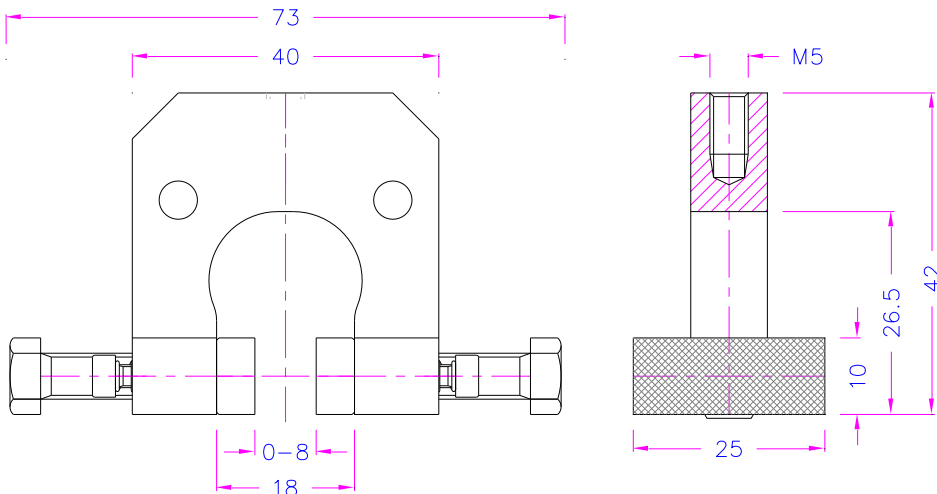



Item no.:	SP227-S46
Max. load:	400 N
Opening:	0-46 mm
Coupling:	Inner thread M5 Further couplings on request
Material:	Aluminium, anodized
Temperature range:	0°C ... +130°C depending on jaw type (see the table, page 1). Further temperature ranges on request
Weight:	90 gram per grip without jaws
Scope of supply:	1 pair of grips without jaws

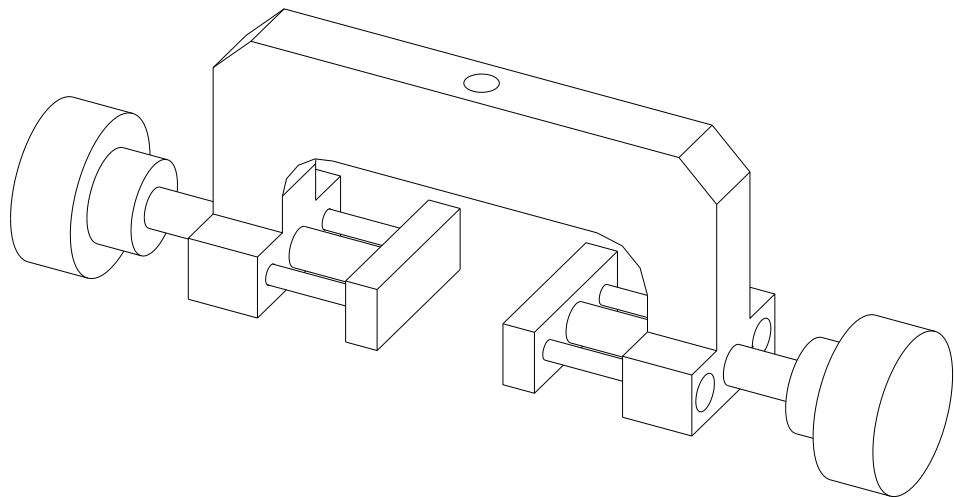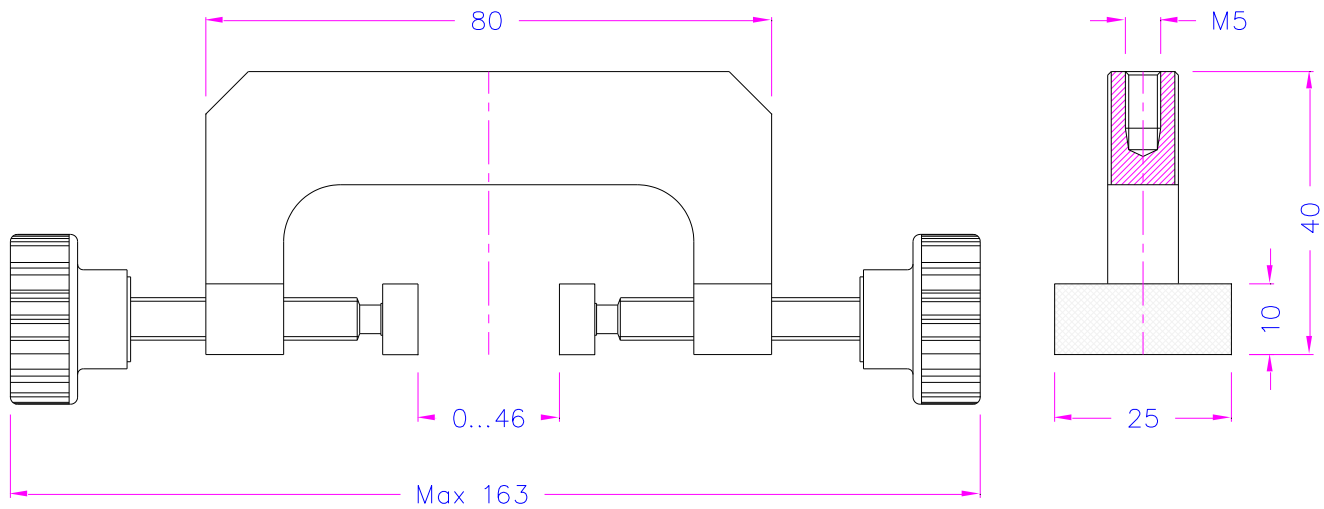

Examples for other versions and custom-built solutions:

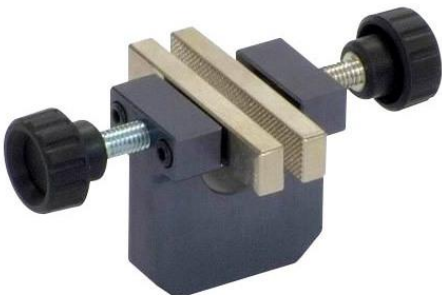	
SP227-A4+BW30-AF159 with jaws 25x30 mm	SP227+BP+DIN6332-M6
	
SP227+BP50	B25 B50 B80 B100
	
SP227-BLCR635x75 - line contact jaws	SP227-BW25x25
	
SP227-BP25x25	

Accessories:

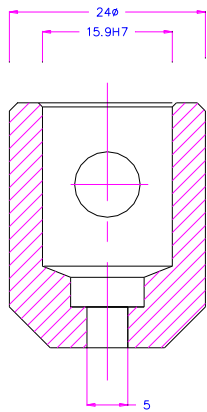

SPS637-159-Km5

SPS637-159-Km5

Adapter female 15.9/8 (5/8")
To fix on SP227 with a M5 screw



SP227+WNE

With a stainless-steel drip tray
100x150x20 mm